



Asus ZenFone 2 Laser ZE550KL Display Replacement

guide for the replacement of the display all'Asus ZenFone 2 Laser 5 "model ZE550KL

Written By: gwsLabs



INTRODUCTION

Outlines what you're going to teach you to do.



TOOLS:

- [Phillips #000 Screwdriver](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Heavy-Duty Spudger](#) (1)
- [Tweezers](#) (1)



PARTS:

- [ze550kl](#) (1)

Step 1 — sim and battery removal



- Remove the back cover
- disconnect the battery
- remove sim card and microSD

Step 2 — Remove the screws




- Unscrew the 15 screws

Step 3 — Inside back cover



- remove the plastic cover with the picks being careful not to break the hooks that hold it in place

Step 4 — Flat cable display

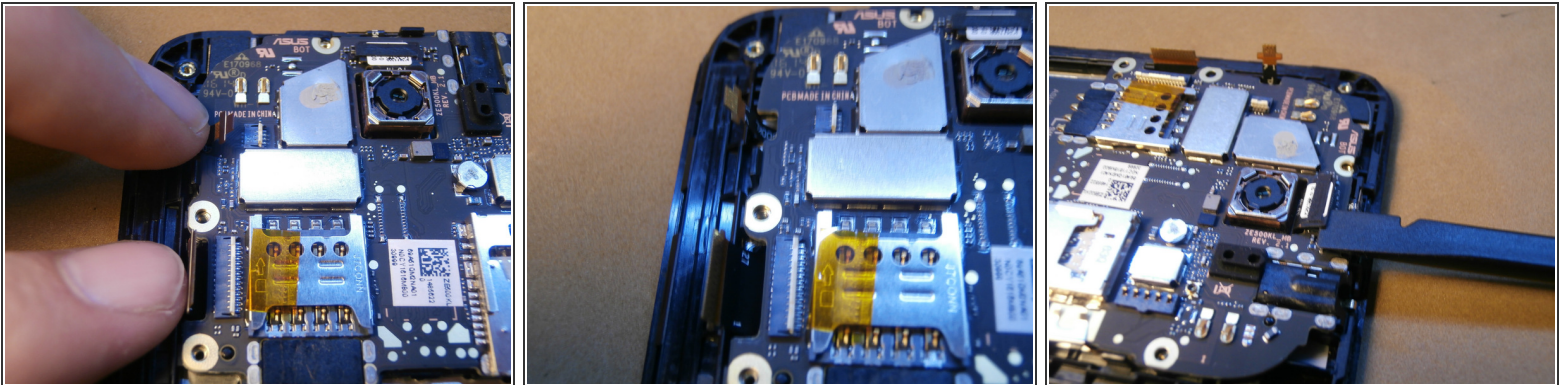

- Disconnect the two flat lifting the still white
- disconnect the camera

Step 5 — rear speaker




- with the help of a spudger remove the rear speaker


Step 6 — motherboard



- from the bottom to lift the motherboard

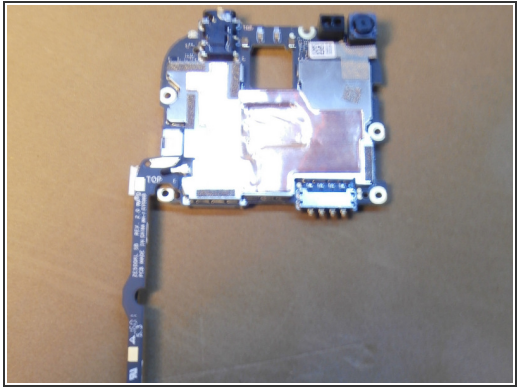


- ## Step 8 — Touchscreen driver

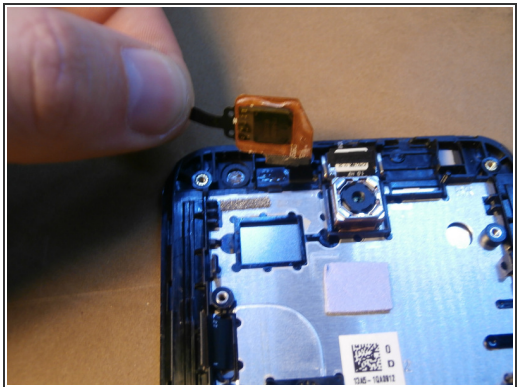


- Page 6 of 9

Step 9 — Removing the display

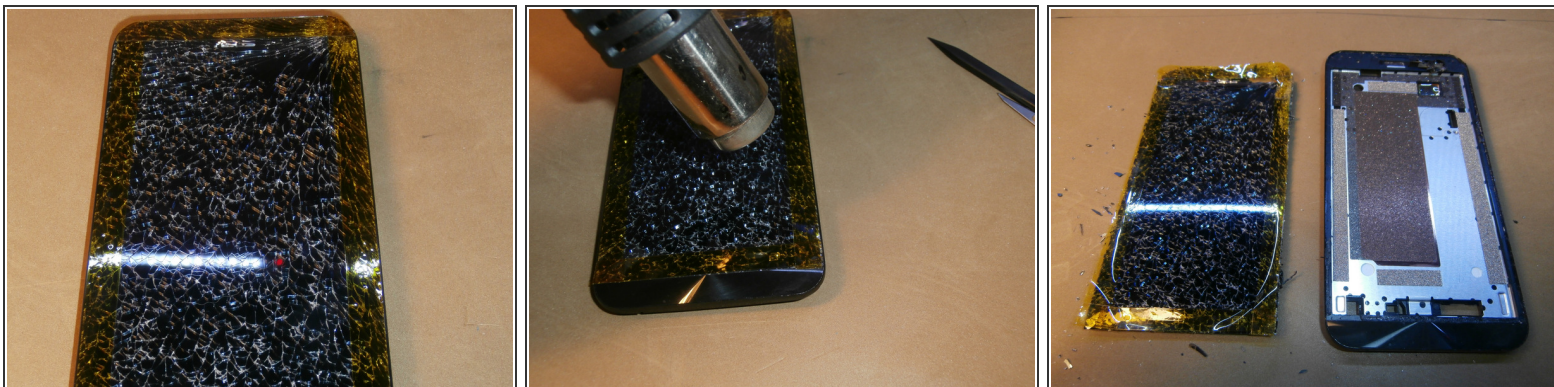



- with the help of a hot air dryer or an iOpener remove the screen from the phone's frame

Step 10 — Preparation of the new panel

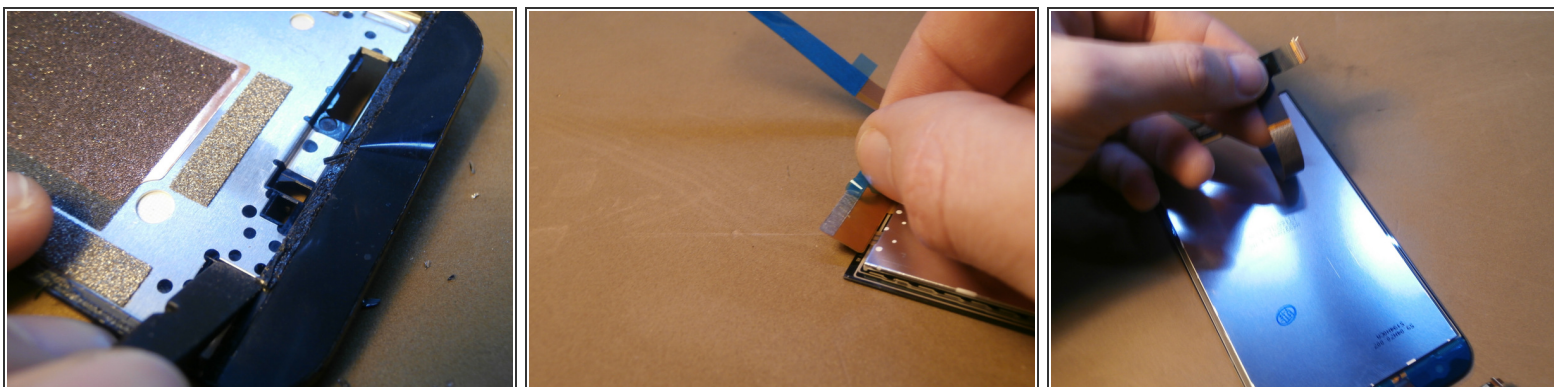




- Remove glue residue on the perimeter of the frame
- paste the flat of the display in position

Step 11 — gluing screen

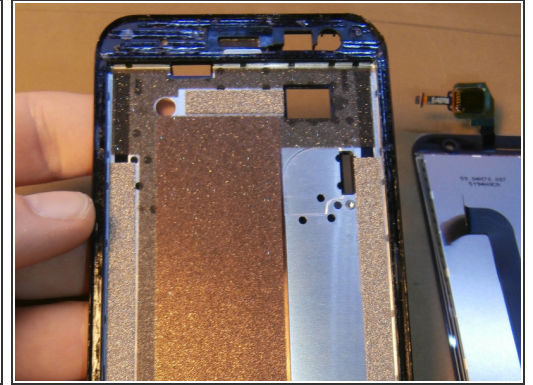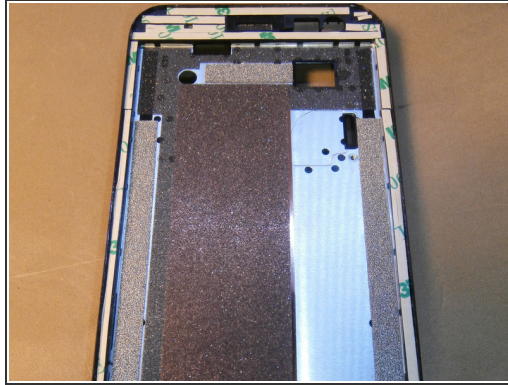

- apply the adhesive to the frame

Step 12 — new screen

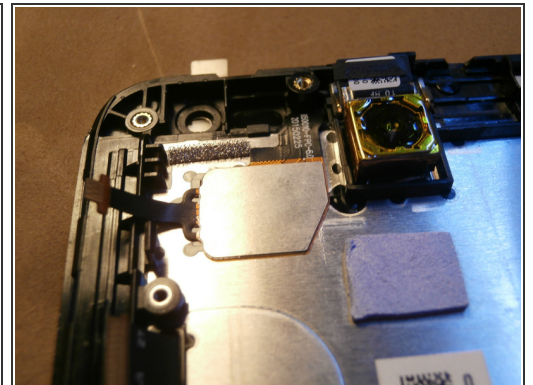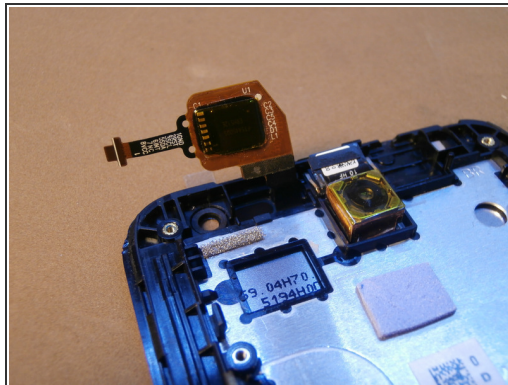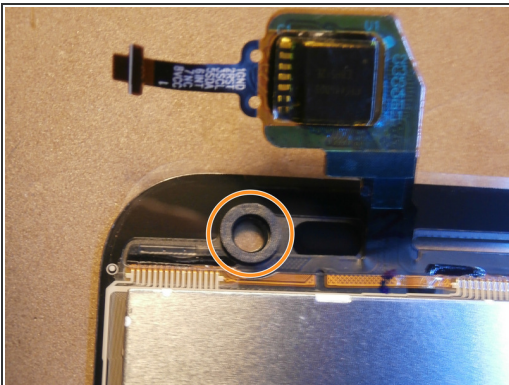

- Before installing the new screen to reposition the dust seal of the front camera
- Insert the new screen into place by passing the flat in the grooves

Step 13 — reassembly



- Replace the logic board

Per rimontare il dispositivo, segui queste istruzioni in ordine inverso.

This document was last generated on 2017-06-20 09:28:58 PM.